




6500K 5700K 5000K 4000K 3500K 3000K 2700K 2200K

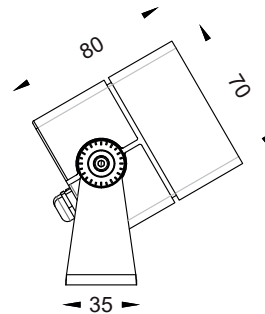

Without Hood



Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-D700409A	9W	4PCS OSRAM/CREE SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12° 20°/25°/30°/40° /45°/60°/10°*22° /20°* 60°	AC220-240V	ON/OFF /Triac/0-10V
EST-D700406	6-9W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
EST-D700409B	6-9W	4PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC24V/DC36V /DC48V	DALI/DMX512
EST-D700409C	6-9W		RGB 3in1			DMX512
EST-D700409D	6-9W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
EST-D700102	2.5W	1PCS LUMINUS SMD	2200-6500K R/G/B/Y/A	3°	AC110-240V	ON/OFF
EST-D700103	1-3W				AC220-240V	
EST-D700105	1-5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512

Material Specifications

LED:CREE/OSRAM.


Housing:12# Die-casting powder coated aluminum.T=60-80µm

Adhesion of ISO class 1/ASTM class 48.


Gasket:Tooling shaped double silicone seal.

Dimmable: Triac/Dali/0-10V/PWM/DMX512.

Working Temperature:-20 to 40C.

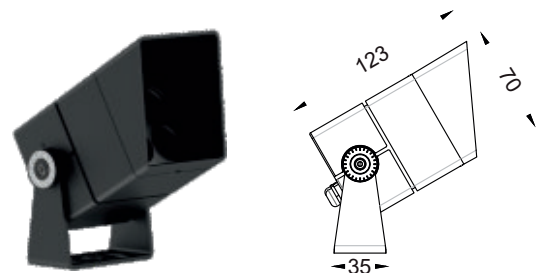

Cuboid hood Angle 25°

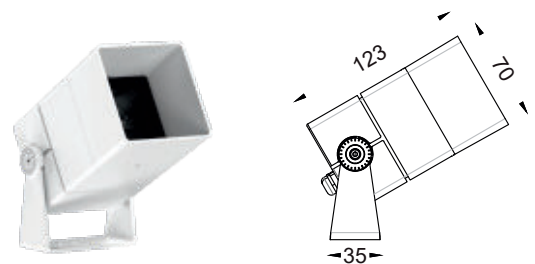

Cuboid hood

Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



EMC-optimised