





Without Hood



MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-GD420103	3-4W	1PCS CREECOB	2700K-6500K	15°/24°/36°/60° (Lens)	AC110-240V	ON/OFF
EST-GD420104					DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
EST-GD420102A	2.5W	1PCS CREE/OSRAM /Luminus SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12°/20° /25°/30°/40°/45° /60°		ON/OFF /Triac/0-10V/DALI /DMX512
EST-GD420101	1.5W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°		DMX512
EST-GD420102B	2W		RGB 3in1			
EST-GD420102C	2W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			

Material Specifications

Housing: CNC 6063# aluminum ,Matt silver/black anodized Finish
or powder coated Lens: Optical lens , efficiency>85%.
Glass Cover: Tempered glass. T= 4mm
Driver: Constant current output,Constant current output
Base: Aluminum ,Spike: ABS
Dimmable Support: Triac/PWM/0-10V/DALI/DMX512
Mounting Type: U bracket&mounting plate for solid ground,spike for soft ground



Features



High colour rendering index



Excellent thermal management



Head/Mounting Plate Rotatable



Optional housing colour





CylindricalHood Angle 45°



Cylindrical Hood



Spike

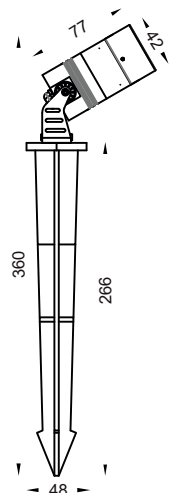

Spike