


Spot Zoomable Projector Light



CREE ⇄



DALI/1-10V
Triac/PWM




CRI>80/90

IP66



Without Hood

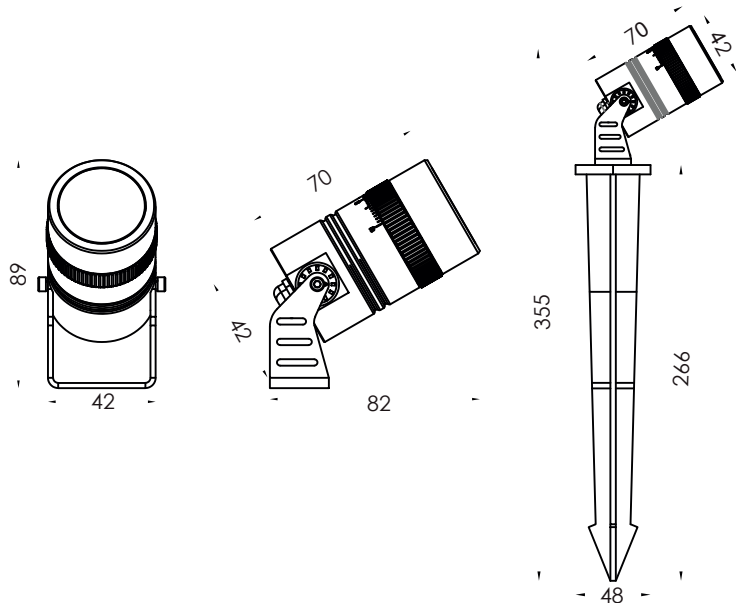

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-GD42TJ0103	2W-3W	1PCS CREE/OSRAM /Luminus SMD	2700K-6500K /R/G/B/A	10-45°	AC110-240V	ON/OFF
EST-GD42TJ0102					DC12V/DC24V /DC36V/DC48V	ON/OFF /DMX512

Material Specifications

Housing: CNC 6063# aluminum ,Matt silver/black anodized Finish or powder coated

Lens: Optical lens , efficiency>85%.

Glass Cover: Tempered glass. T= 4mm

Driver: Constant current output,Constant current output

Power Cable: H05RN-F 2*1.0MM L±0.5M (Low voltage)

H05RN-F 3*1.0MM L±0.5M (High voltage)


Operating Temperature: -20°C~40°C

Base: Aluminum

Spike: ABS

Dimmable Support:Triac/PWM/0-10V/DALI/DMX512

Mounting Type: U bracket&mounting plate for solid ground,spike for soft ground

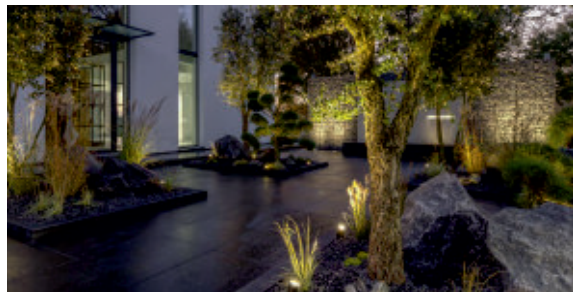

Features



High colour
rendering index



Excellent thermal
management



Head/Mounting Plate
Rotatable



Optional housing
colour