




Max. 3M length / Unit

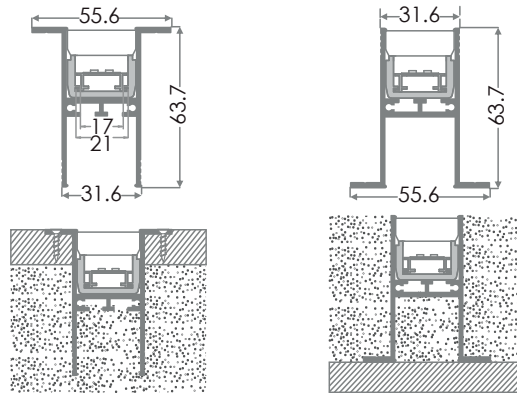

Cover With Frame

Frameless Cover

Physical Dimension(MM)

MODEL NO.	POWER	LED COLOR	INPUT VOLT	LENS DEGREE	SIZE
EST-SFL04AL2-300	6W	2400K-6500K	24V DC	Diffuser soft beam 110°	300*55.6*63.7mm
EST-SFL04AL2-500	10W				500*55.6*63.7mm
EST-SFL04AL2-600	12W				600*55.6*63.7mm
EST-SFL04AL2-1000	20W				1000*55.6*63.7mm
EST-SFL04AL2-1200	24W				1200*55.6*63.7mm

Material Specifications

Ip67 LED profile

suit for indoor or outdoor light decoration

linear light design , homogeneous and dots free

Installation: recessed or surface mounting


Cable output: from the bottom or end

IP rating: Ip67


Maximum 20W/m

UV resistance

Maximum stand weight: 30kN

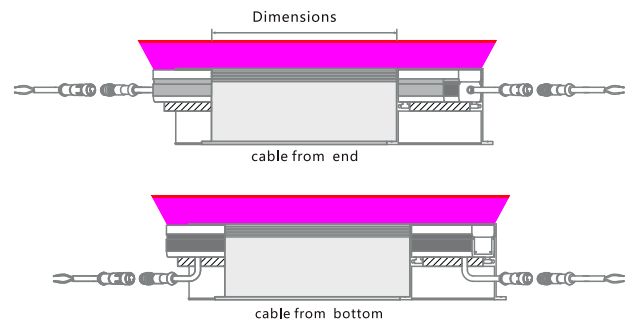

Aluminum profile,
6063 aluminum material
anodized or Powder coating finished
1m,2m,3m length,
Customized length is available
on request.



PMMA one time extrusion profile,
maximum can be 3meter length.
Customized length is available on
request.



Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



Various construction
sizes