
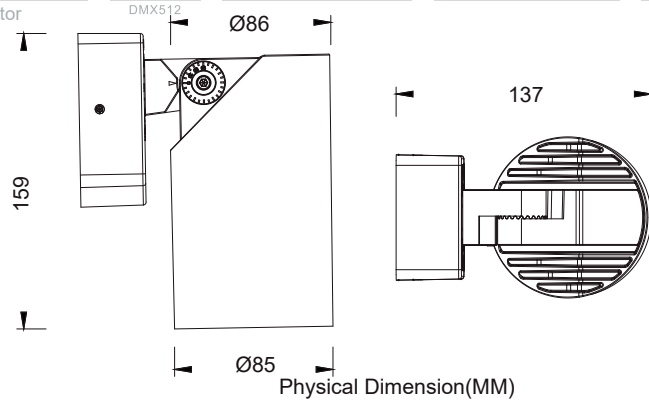


Wall Mounted Landscape Light



MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-SMWL860115A	15W/22W	1PCS CREE/BRIDGELU X /CITILED COB	2700-5700K	15°/18°/34°/60° (Reflector Cup)	AC220-240V /AC110-240V	ON/OFF /Triac
EST-SMWL860120A	15W/20W				AC220-240V /AC110-130V	/Triac/0-10V /DALI
EST-SMWL860124A	15W-24W				DC24V/DC48V	ON/OFF /Triac/0-10V /DALI/DMX512
EST-SMWL860115B	15W/22W			15°/24°/36°/60° (Lens)	AC220-240V /AC110-240V	ON/OFF /Triac
EST-SMWL860120B	15W/20W				AC220-240V /AC110-130V	/Triac/0-10V /DALI
EST-SMWL860124B	15W-24W				DC24V/DC48V	ON/OFF /Triac/0-10V /DALI/DMX512
EST-SMWL860124C		1PCS TYANSHINE /BRIDGELUX COB	Tunable White 2700/6500K	15°/24°/36°/50° (Lens)	DC48V	PWM/DMX512
EST-SMWL860124D		1PCS TYANSHINE COB	RGB 3in1			
EST-SMWL860124E			RGBW 4in1 (W:6500K)			

Material Specifications

Housing: 12# Die-casting powder coated aluminum. T=60-80µm
 Adhesion of ISO class 1/ASTM class 48.
 Gasket: Tooling shaped double silicone seal.
 Dimmable: Triac/Dali/1-10V/PWM/DMX512.
 Power Cable: H05RN-F 2*1.0mmL =0.5M(Low voltage). H05RN-F
 3*1.0mmL² =0.5M(high voltage).
 Working Temperature:-20 to 40C. °



Features



High colour rendering index



Excellent thermal management



Dimmable versions available



EMC-optimised

