



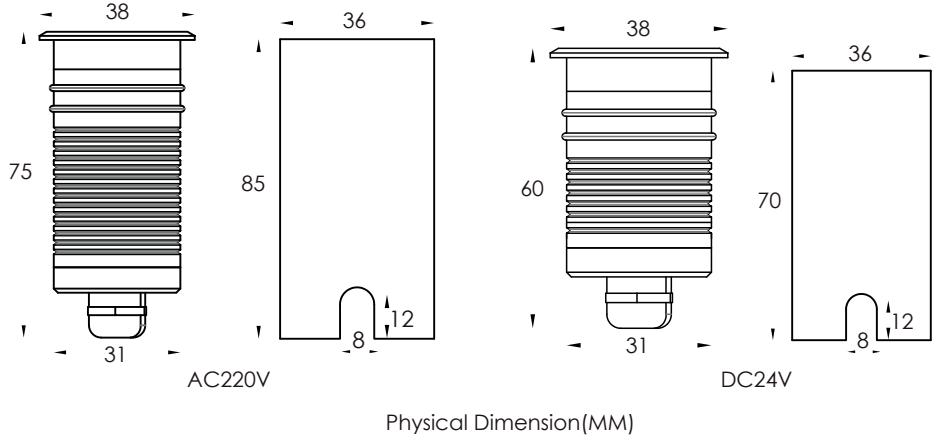

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-UPL380101A	1-1.5W	1PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	12°/25°/40°/60°	AC220-240V	ON/OFF
EST-UPL380101B	1-1.5W				DC12V/DC24V	ON/OFF
EST-UPL380102A	2W				/DC36V/DC48V	/Triac/0-10V/DALI
EST-UPL380102B	2W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
EST-UPL380101C	1.5W		RGB 3in1			
EST-UPL380102C	2W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS

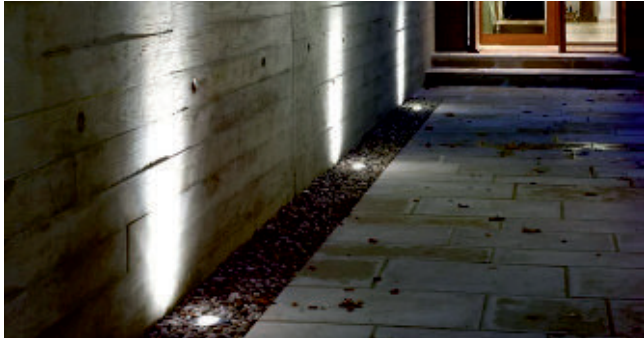

Inground Recessed

Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



Available in round
or square

Recessed Inground Uplight



RGB 3 in 1



RGBW 4 in 1

CREE



DMX512 DC24V AC220V
IP68 Connector

DALI/1-10V
Triac/PWM

CRI>80/90

IP67

IK08

