

Recessed Inground Uplight



CREE ⇄




DALI/1-10V
Triac/PWM

CRI>80/90


IP67

IK08

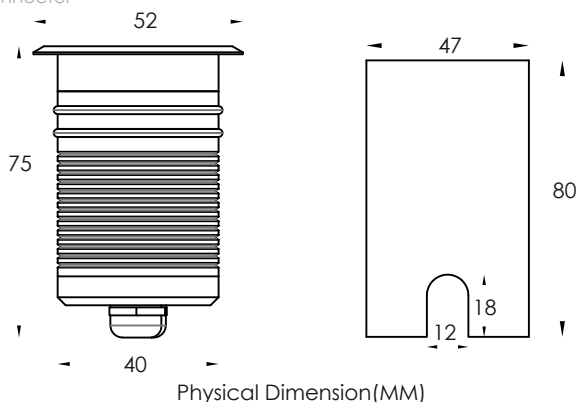

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-UPL520102A	2-3W	1PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	5°/8°/10° /12°/25°/40°/60°	AC110-240V	ON/OFF
EST-UPL520102B	2.5W 2-3W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
EST-UPL520103A					V	DMX512
EST-UPL520102C	2W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
EST-UPL520101	1.5W		RGB 3in1		DC24V	
EST-UPL520102D	2.5W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
EST-UPL520103B	3W	1PCS CREE/LUMINUS COB	2700K-6500K	24°/36° (Reflector Cup)	AC110-240V	ON/OFF
EST-UPL520103C	2-3W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac /0-10V/DALI/DMX512

Material Specifications

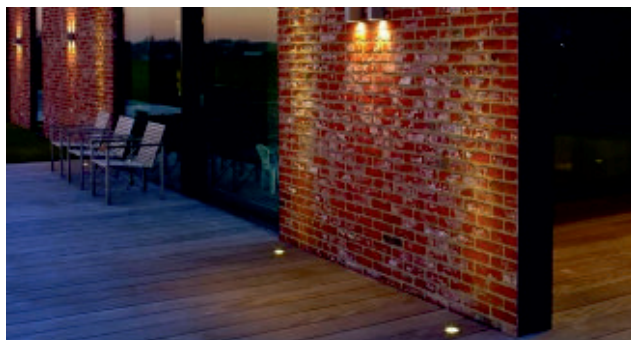

Ceiling Recessed



Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



EMC-optimised