


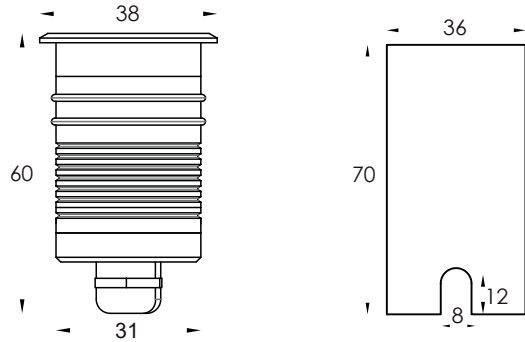

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
EST-UW380101B	1-1.5W	1PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	12°/25°/40°/60°	DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
EST-UW380102A	2W				1PCS TYANSHINE SMD	Turnable White 2700K/6500K RGB 3in1 RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)
EST-UW380102B	2W					
EST-UW380101C	1.5W					
EST-UW380102C	2W					


Material Specifications

Front cover&Housing:CNC Stainless steel SUS 316L#
Lens: Optical lens, efficiency≥85%
Glass:Step tempered glass.T=8mm
Gasket:Tooling shaped seal
Driver:Constant current output,Constant current output
Power cable:H07RN-F 2X1.0mm=3m(low voltage)
Mounting sleeve:ABS.


Square Cover



Mounting Sleeve

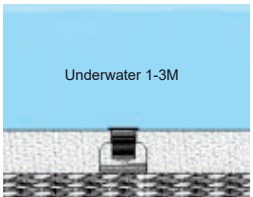

Ground Recessed

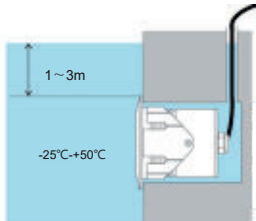

Wall Recessed

Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



Efficient Spherolit
technology

WARNING:Must be installed under the water to prevent the light from being burnt off because of over-heating.



RGB 3 in 1



RGBW 4 in 1

CREE ⇄



DMX512 DC24V
IP68 Connector

DALI/1-10V
Triac/PWM

IP68
OUTDOOR RATED

IK08

CRI>80/90

SS316L

