


RLL037

Surface Mounted Series




Types of Installation:

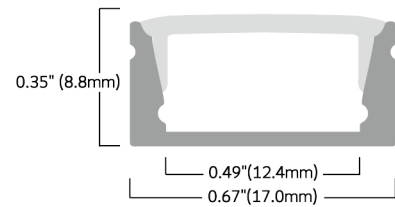

Profile color


- Black
- Silver
- White

Profile Components



PC

clear/diffused/opal matte /
black/Prismatic Frosted




PMMA

clear/diffused/
opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

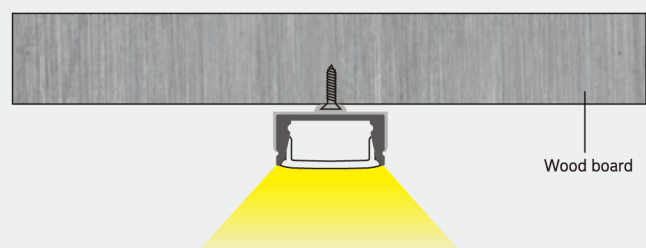

Effect Image



Installation Accessories


End cap × 2



End cap with
hole × 2



Mounting clip

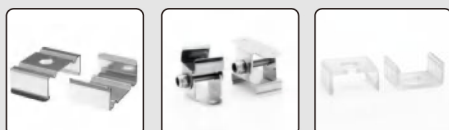

Connector



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m