

RLLFW3D5055



IP67 high power 3D flex LED grazer has been designed with anti-glare housing, flexible, easy to fix, 24V, power up to 32W in 1200mm length, Maximum 1200mm length;
Beam angle 15°/30°/45°/15 x 20°/20 x 50° are available, it is an ideal product for indoor and outdoor architectural lighting project



CE RoHS




Suit for class 2 power unit, maximum connected power not more than 100W

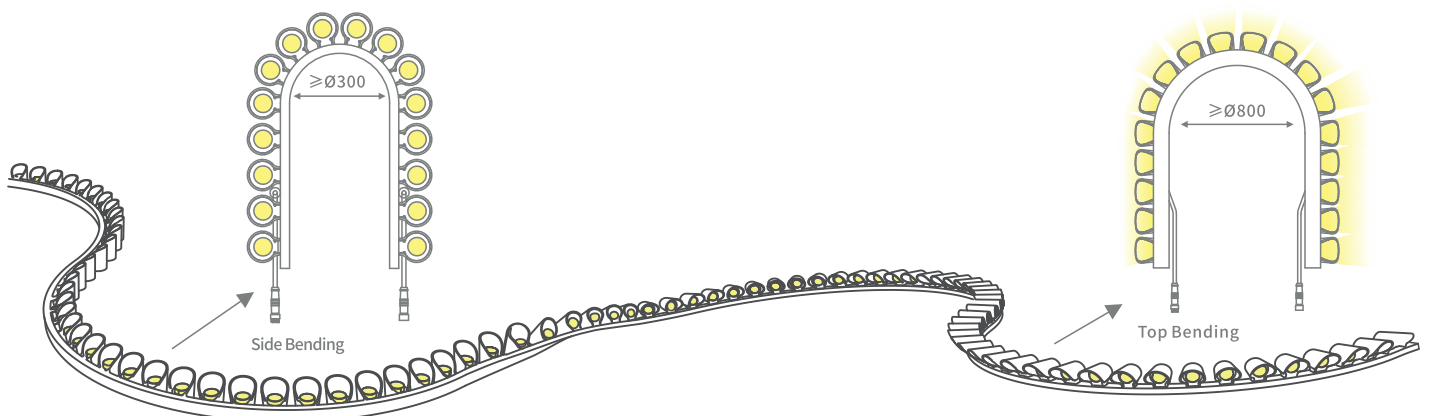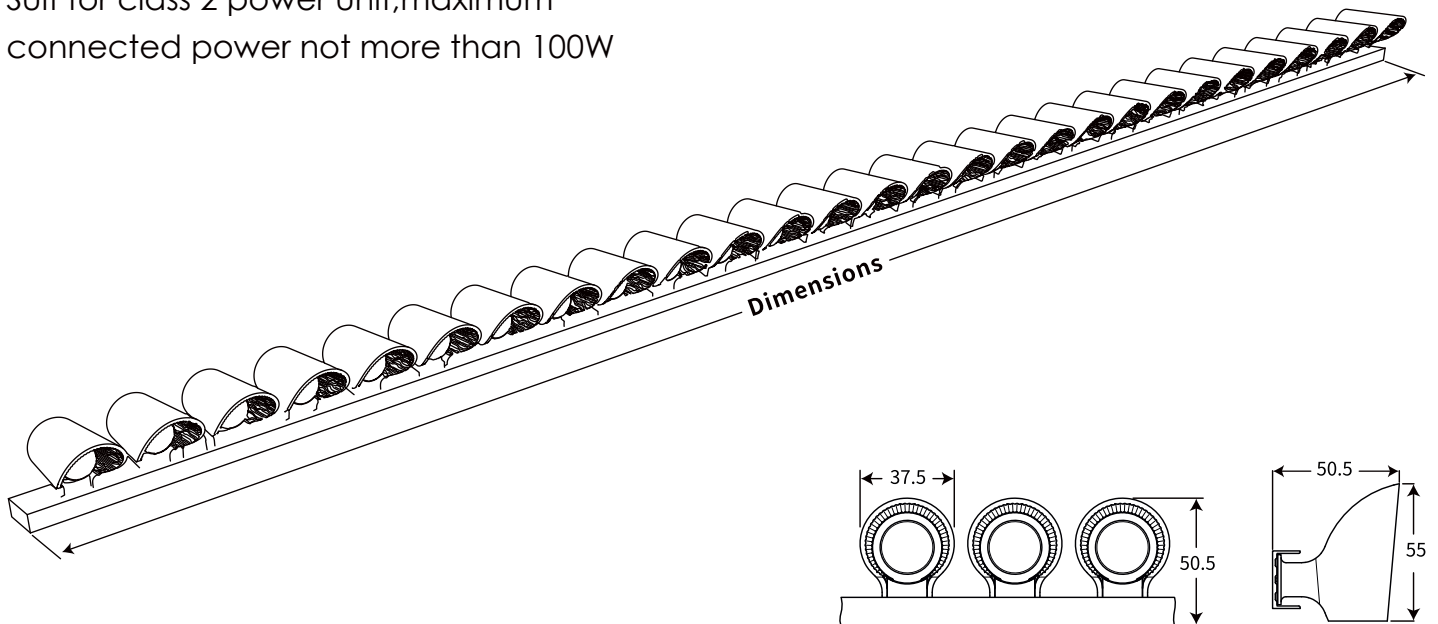

Basic Parameter

LED Brand	3535
LED Q'ty	28PCS/1.2m
Dimension	1200 X 55 X 50.5 MM
Working Temperature	-40~+45 °C
IP Class	IP67
Beam Angle	15°/30°/45°/15 x 20°/20 x 50°
Warranty	3 years Warranty
Exposure to sunlight max 30 minutes after sunrise or before sunset.	

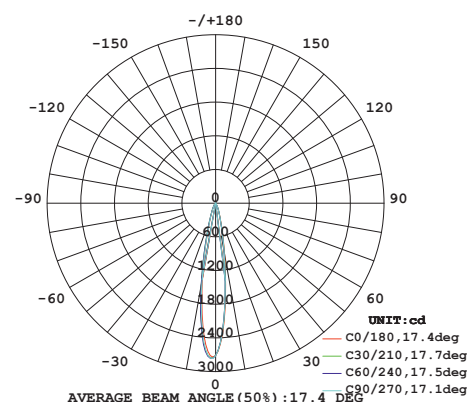

Electrical Parameter

Power	22W/1.2m
Input Voltage	24V DC

Optical Parameter

LED		DMX-RGB /DMX-RGBW(16bits)	
Dimming mode		DMX512	
Pixels		4Pixels/M	
Distinguishability		16bits(65536)	
wavelength	Color	Minimum Dominant Wavelength (nm)	Maximum Dominant Wavelength(nm)
	R	615	630
	G	515	530
	B	450	460
cct	w	3000K	Ra≥80
		4000K	
		5000K	
		6500K	Ra≥70

