


Features:


- 3D bending and top lighting
- Brand LED optional
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- Min. top bending radius 15 cm
- Min side bending radius 40cm
- Optional beam angles: 20°/30°/45°/60°/20x45°

Application:

- Outdoor and indoor wall washer lighting

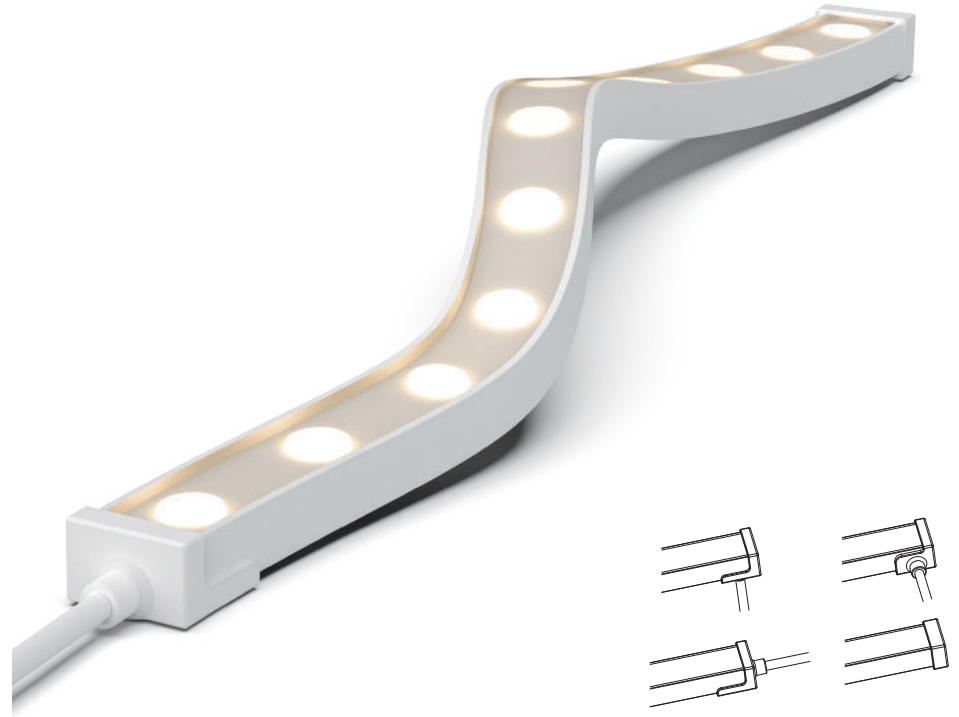

Installation accessories:

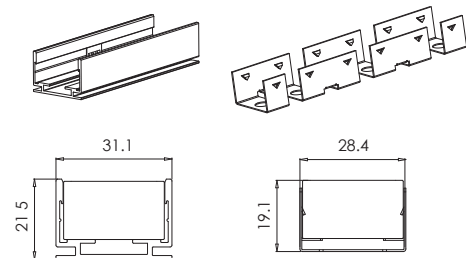

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFW3D 2716	DC24V	24	1990	2700K	5mtrs	41.67	24
		24	2100	3000K	5mtrs	41.67	24
		24	2250	4000K	5mtrs	41.67	24
RLLFW3D 2716-TW	DC24V	16+16	1250	Tunable White	5mtrs	41.67	24