


Features:


- Top lighting and top bending
- 2835 LED with integrated lens
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP65 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- Bending radius 8cm
- Beam Angle: 40°x70°

Application:

- Indoor damp condition wall washer lighting
- High quality cove lighting

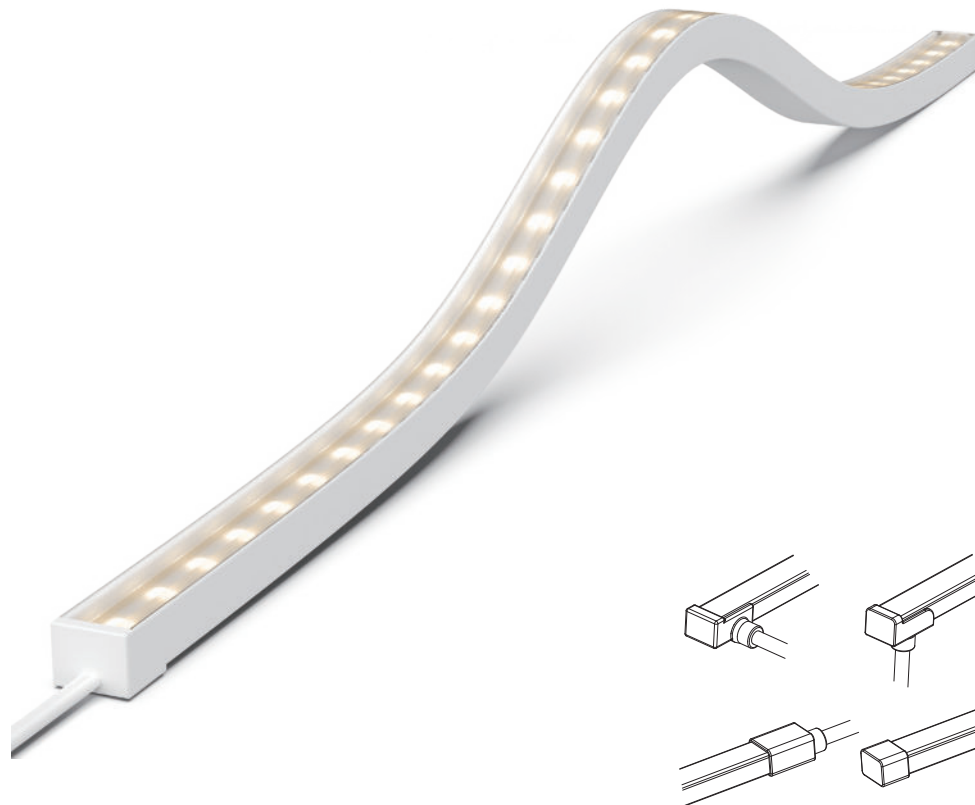

Installation accessories:

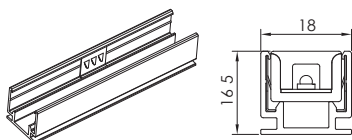

Item	Input Voltage	Power (W/m)	Flux (Lm/m)	Available Color	Max. length (Single-end power in)	Cutting unit (mm)	LED Qty/m (LEDs/m)
RLLFWTB 1410	DC24V	12	740	2700K	5mtrs	100	60
		12	780	3000K	5mtrs	100	60
		12	820	4000K	5mtrs	100	60