




Optics Option



Adjustable bracket available

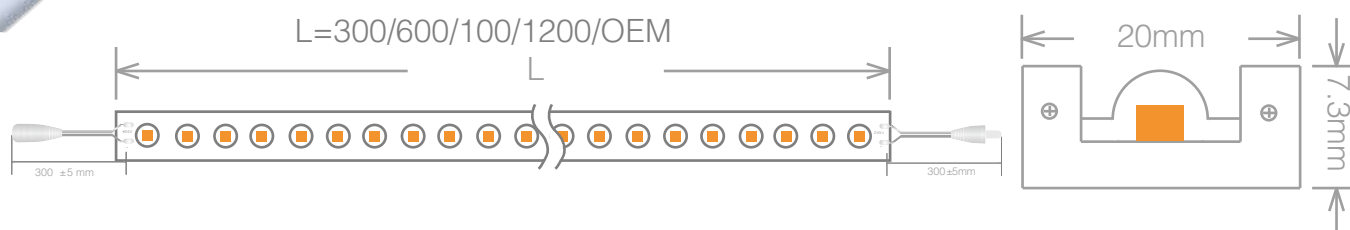


Product Features

- ◆ Attractive and compact design, easy installation
patent no facula diffused lens
- ◆ Simple structure design, excellent waterproof performance
(3years warranty)
- ◆ Available in 7colors variations and RGB/RGBW color mixing,
creat any light effect you desire
- ◆ High efficiency light source, professional
mixed light design,a light and delicate uniform,
long projection distance, and color temperature
optional
- ◆ Support DMX512 control system
- ◆ Working Ambient:-20°C - 50°C (-4°F - 122°F)

Product Application

- ◆ Can be mounted to walls, floors or ceilings.
Ideally suited to architectural lighting,
landscape lighting, garden lighting,
facade lighting, theatres, bridges, offices,
hotels, shopping centres, bars and night clubs.

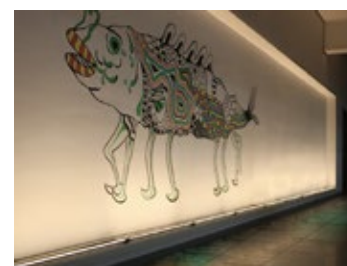

Product Specification



LED

Light Source: SMD5630
Input Voltage:24VDC
CRI>80Ra
Rated Lifespan:50,000h

Beam angle:25 °/45 °/
60 °/80 °

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W1-030-5630-18-45° -24V	3.6-4.3W	L300*W20*H7.3mm	350-460LM
RHEA-W1-060-5630-36-45° -24V	7.6-8.2W	L600*W20*H7.3mm	700-720LM
RHEA-W1-100-5630-60-45° -24V	12-14.4W	L1000*W20*H7.3mm	1160-1200LM
RHEA-W1-120-5630-72-45° -24V	14.4-17.2W	L1200*W20*H7.3mm	1400-1440LM

Product Specification



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W1-030-5050-18-45° -24V	3.6-4.3W	L300*W20*H7.3mm	320-335LM
RHEA-W1-060-5050-36-45° -24V	7.6-8.2W	L600*W20*H7.3mm	640-670LM
RHEA-W1-100-5050-60-45° -24V	12-14.4W	L1000*W20*H7.3mm	1060-1100LM
RHEA-W1-120-5050-72-45° -24V	14.4-17.2W	L1200*W20*H7.3mm	1270-1330LM



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W1-030-5050-18-45° -24V-RGB	3.6-4.3W	L300*W20*H7.3mm	160LM
RHEA-W1-060-5050-36-45° -24V-RGB	7.6-8.2W	L600*W20*H7.3mm	320LM
RHEA-W1-100-5050-60-45° -24V-RGB	12-14.4W	L1000*W20*H7.3mm	560LM
RHEA-W1-120-5050-72-45° -24V-RGB	14.4-17.2W	L1200*W20*H7.3mm	640LM



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W1-030-5050-18-45° -24V -RGBW	3.6-4.3W	L300*W20*H7.3mm	245LM
RHEA-W1-060-5050-36-45° -24V -RGBW	7.6-8.2W	L600*W20*H7.3mm	490LM
RHEA-W1-090-5050-60-45° -24V-RGBW	12-14.4W	L1000*W20*H7.3mm	730LM

*PS: Length customized and cable type customized

Working Mode:

- 1). Independent Mode: single power on and no color changing.
- 2). PWM Mode: with separated controller RF or IR to control.
- 3). DMX Mode: International standard DMX512 signal DMX decoder needed).


Product Model



Adjustable bracket available



Optics


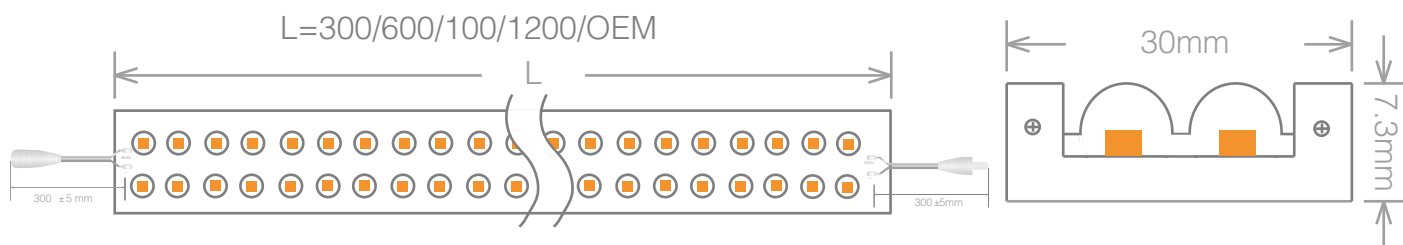


Product Features

- ◆ Attractive and compact design, easy installation
patent no facula diffused lens
- ◆ Simple structure design, excellent waterproof performance
(3years warranty)
- ◆ Available in 7colors variations and RGB/RGBW color mixing,
creat any light effect you desire
- ◆ High efficiency light source, professional
mixed light design,a light and delicate uniform,
long projection distance, and color temperature
optional
- ◆ Support DMX512 control system
- ◆ Working Ambient:-20°C - 50°C (-4°F - 122°F)

Product Application

- ◆ Can be mounted to walls, floors or ceilings.
Ideally suited to architectural lighting,
landscape lighting, garden lighting,
facade lighting, theatres, bridges, offices,
hotels, shopping centres, bars and night clubs.

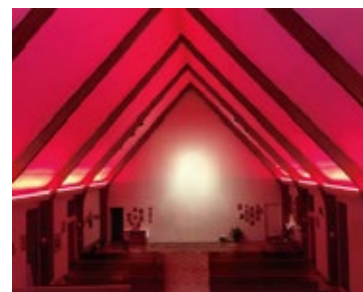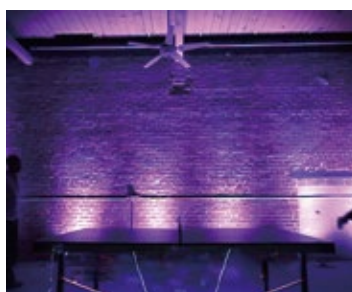

Product Specification



LED

Light Source: SMD5630
Input Voltage:24VDC
CRI>80Ra
Rated Lifespan:50,000h

Beam angle:25 °/45 °/
60 °/80 °

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W2-030-5630-36-45° -24V	7.2-8.6W	L300*W30*H7.3mm	700-720LM
RHEA-W2-060-5630-72-45° -24V	14.4-17.2W	L600*W30*H7.3mm	1400-1440LM
RHEA-W2-100-5630-120-45° -24V	24-28.8W	L1000*W30*H7.3mm	2320-2400LM
RHEA-W2-120-5630-144-45° -24V	28.8-34.2W	L1200*W20*H7.3mm	2800-2880LM

Product Specification



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W2-030-5050-36-45° -24V	7.2-8.6W	L300*W30*H7.3mm	630-660LM
RHEA-W2-060-5050-72-45° -24V	14.4-17.2W	L600*W30*H7.3mm	1260-1320LM
RHEA-W2-100-5050-120-45° -24V	24-28.8W	L1000*W30*H7.3mm	2100-2200LM
RHEA-W2-120-5050-144-45° -24V	28.8-34.2W	L1200*W30*H7.3mm	2500-2620LM



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W2-030-5050-36-45° -24V-RGB	7.2-8.6W	L300*W30*H7.3mm	320LM
RHEA-W2-60-5050-72-45° -24V-RGB	14.4-17.2W	L600*W30*H7.3mm	640LM
RHEA-W2-100-5050-120-45° -24V-RGB	24-28.8W	L1000*W30*H7.3mm	1120LM
RHEA-W2-120-5050-144-45° -24V-RGB	28.8-34.4W	L1200*W30*H7.3mm	1280LM



LED

Light Source: SMD5050
Input Voltage: 24VDC
CRI > 80Ra
Rated Lifespan: 50,000h

Beam angle: 25°/45°/
60°/80°

Part. No.	Power(min/max)	Product Dimension	Lumens
RHEA-W2-030-5050-36-45° -24V-RGBW	8.4-10W	L300*W30*H7.3mm	245LM
RHEA-W2-060-5050-72-45° -24V-RGBW	16.8-20W	L600*W30*H7.3mm	490LM
RHEA-W2-090-5050-108-45° -24V-RGBW	25.2-30W	L900*W30*H7.3mm	730LM

*PS: Length customized and cable type customized

Working Mode:

- 1). Independent Mode: single power on and no color changing.
- 2). PWM Mode: with separated controller RF or IR to control.
- 3). DMX Mode: International standard DMX512 signal DMX decoder needed).