



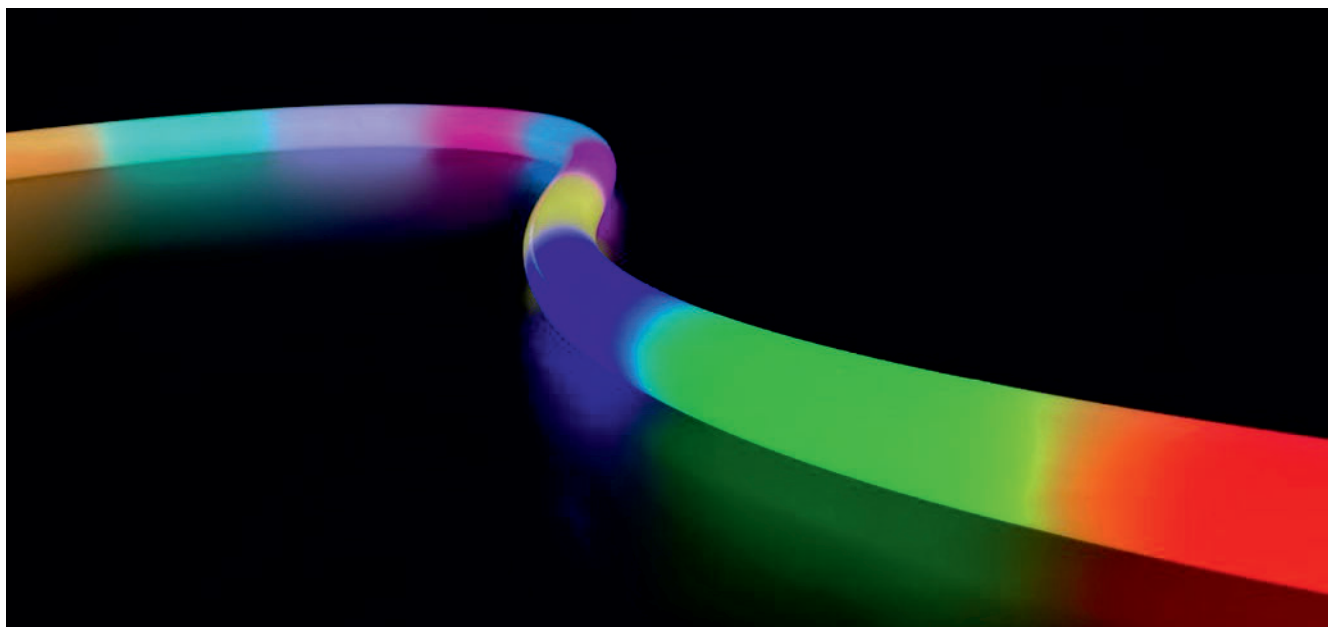


## RLLNFR25 SPI Pixel

- IP67 protection level, salt solution resistance, weak acid and alkali corrosion and UV resistance.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- 3 years warranty, working life  $\geq 30000$  hours;



Model:SK NR25 Crgb

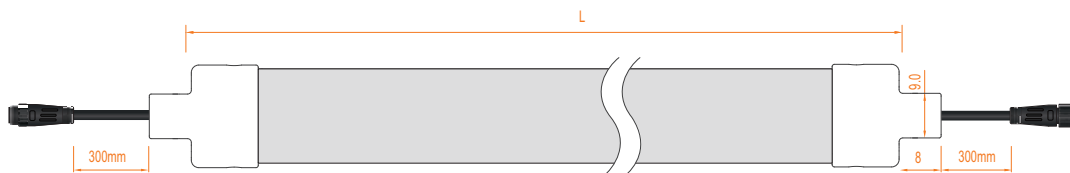

### Cable

| Cable Type     | Schematic Diagram                                                                   | Specification | Core  | Electrical Properties             |
|----------------|-------------------------------------------------------------------------------------|---------------|-------|-----------------------------------|
| PVC Cable      |  | OD: 5.0mm     | ● ● ● | SPI: Red V+, Green DI/DQ Black V- |
| Silicone Cable |  | OD: 5.0mm     | ● ● ● | SPI: Red V+, Green DI/DQ Black V- |

### RGB

| Voltage (V) | Power (W/M) | CCT/Color | Lumen (LM/M) | Efficiency (LM/W) | Pixel (PCS) | Unit length (mm) | Signal Type | IC Model |
|-------------|-------------|-----------|--------------|-------------------|-------------|------------------|-------------|----------|
| DC24V       | 9.6         | R         | 112          | 11.7              | 10          | 100              | SPI         | WS2811   |
|             | 9.6         | G         | 350          | 36.5              |             |                  |             |          |
|             | 9.6         | B         | 54           | 5.6               |             |                  |             |          |
|             | 25          | RGB       | 474          | 19.0              |             |                  |             |          |