



LED Neon Flex Series

3-face view: RLLNFTRI1006

High quality and high brightness SMD LED chip.
Environmentally friendly & energy efficient.
High color consistency & smooth illumination With invisible light dots.
Perfect softness, gentle emitting, Not dazzling.



Specifications

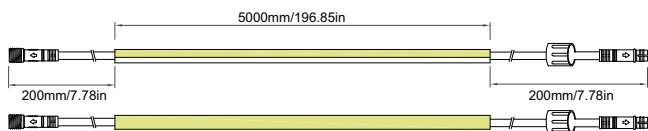

Fittings



Aluminum tank

Item NO JA0049
Dimension 1000*11.8*9.3mm
Material Aluminium



Bendable Stainless Steel Profile

Item NO: JL0004
Dimension 1000*16.9*17mm
Material 304 Stainless steel




Transparent PC Slot

Item NO Ja0039
Dimension 1000*12.2*8.5mm
Material Transparent PC



Rubber sleeve

Item NO JL0014
Dimension 10*11.94*7.5mm
Material 316 Stainless steel



Screw

Item NO JL0014
Dimension 10*11.94*7.5mm
Material 316 Stainless steel



Transparent accessories


Item NO: JK0022
Dimension 20*12.2*8.5mm
Material Transparent PC

Application



Luminaire Photometric Data

Luminous intensity distribution diagram

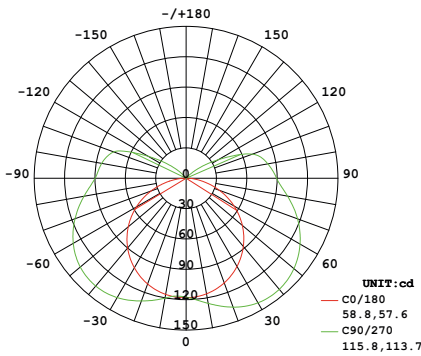

AVERAGE BEAM ANGLE(50%):172.9 DEG


Connection Methods



Top end



End Cap



Datasheet

Model No.	CCT	LED Model	LEDs/M	Typ.Colour Temp	Power (W/M)	Lumens (lm/M)	CRI	Unit Length	FPC Width	Maximum connection length
NF Z27320C Q	2700K	COB	320	2600 2800	10.0	700	90	50	8	10M
NF Z30320C Q	3000K	COB	320	2850 3300	10.0	720	90	50	8	10M
NF Z40320C Q	4000K	COB	320	3850 4400	10.0	760	90	50	8	10M
NF Z50320C Q	5000K	COB	320	4800 5400	10.0	780	90	50	8	10M
NF Z65320C Q	6500K	COB	320	5600 7000	10.0	800	90	50	8	10M
NF ZRE320C Q	Red	COB	320	620 625nm	10.0	238		50	8	10M
NF ZGR320C Q	Green	COB	320	520 525nm	10.0	306		50	8	10M
NF ZBL320C Q	Blue	COB	320	460 465nm	10.0	170		50	8	10M
NF ZYE320C Q	Yellow	COB	320	590 595nm	10.0	390		50	8	10M