





SIZE

Unit:mm




Length of product:



Silver
 Black
 White (R8018)



aluminum housing with excellent heat dissipation, pc cover come with uniform illumination, use the high lifetime SMD and COB light strips for indoor decorative lighting.

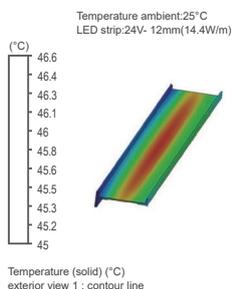


TECHNICAL DATA SHEET	
Housing Material	AL6063-T5
Surface	Anodized/ Painting
PC cover	Diffuser
Product Weight (Kg)	0.13Kg/m
Watt(W)	14.4W/m
Input Voltage(V)	12VDC/24VDC
LED Qty	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width	17 mm(max.)
CCT(K)	2700K-6500K
Beam Angle (°)	120°
SDCM	<3/<6
CRI	80/90
Ingress Protection	IP20 IK06
Lifetime (hr)	50,000h
Glow wire test (°C)	750°C
Operating Temp.(°C)	-20°C ~40°C
Storage Temp.(°C)	-20°C ~65°C
Installation	Recessed

FEATURES

- Indoor Linear Lighting System
- The housing material made of AL6063-T5 alloy for superior heat dissipation.
- The housing material finished in anodized and power painting; Colors includes sliv 、 ewhrite 、 black etc.
- PC material lampshade, high light transmittance, uniform and soft light emission.
- End caps fit tightly to the profiles, anti-leak, optional end caps with and without holes.
- Lampshade fits tightly to the lamp body, anti-mosquito.
- Length of lamp body - lampshade can be cut, the maximum length of 3m.
- Light source can choose SMD, COB strip, CCT 2700-6500K available.
- Convenient and simple installation.
- Exquisite appearance design blends perfectly with the actual application environment.

INSTALLATION

Recessed

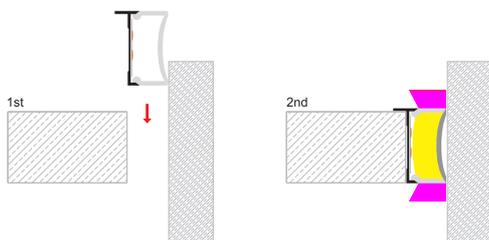

Art-No.	Picture
LSS241030 COB 24V-320-12mm	
LSS241027 SMD 24V-120-12mm	

FL1318

ACCESSORIES LIST

ALUM CASE



COVER



SOLDERLESS WITH WIRE END CAP



APPLICATION

