

1. Slim 5mm LED tape light, use SMD3528 LED.
2. 60LEDs| 120LEDs| 180LEDs per meter for option.
4. IP20 and IP54 protection.

⑤

1

2700 K	3000 K	3500 K
4000 K	5000 K	6500 K

2

3


4

5


Super Slim 5mm

Part Number:EST-FS3528C-180H-24-Y

Model	Color temp. Wave lengths	LM/M	Power/M	CRI (Ra)	FPC copper
ES-FS3528WW-180H-24-Y	2700K	1026LM	<14.4W	90+	3OZ
ES-FS3528WW-180H-24-Y	3000K	1026LM	<14.4W	90+	3OZ
ES-FS3528WW-180H-24-Y	3500K	1026LM	<14.4W	90+	3OZ
ES-FS3528NW-180H-24-Y	4000K	1100LM	<14.4W	90+	3OZ
ES-FS3528NW-180H-24-Y	5000K	1100LM	<14.4W	90+	3OZ
ES-FS3528PW-180H-24-Y	6500K	1150LM	<14.4W	90+	3OZ
ES-FS3528R-180H-24-Y	620-625 NM NM	— —	<14.4W	90+	3OZ
ES-FS3528Y-180H-24-Y	585-590 NM NM	— —	<14.4W	90+	3OZ
ES-FS3528G-180H-24-Y	517-522 NM NM	— —	<14.4W	90+	3OZ
ES-FS3528B-180H-24-Y	465-470 NM NM	— —	<14.4W	90+	3OZ

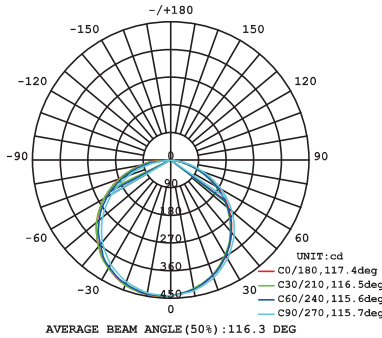

Strip length: CE:500CM UL:16.4FT

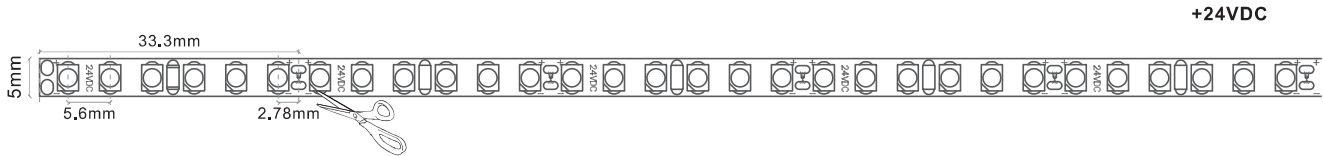

IP Rating:


- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated




Super Slim 5mm

Part Number:EST-FS3528C-120H-24-Y

Model	Color temp. Wave lengths	LM/M	Power/M	CRI (Ra)	FPC copper
ES-FS3528WW-120H-24-Y	2700K	740LM	<9.6W	90+	3OZ
ES-FS3528WW-120H-24-Y	3000K	740LM	<9.6W	90+	3OZ
ES-FS3528WW-120H-24-Y	3500K	740LM	<9.6W	90+	3OZ
ES-FS3528NW-120H-24-Y	4000K	768LM	<9.6W	90+	3OZ
ES-FS3528NW-120H-24-Y	5000K	768LM	<9.6W	90+	3OZ
ES-FS3528PW-120H-24-Y	6500K	780LM	<9.6W	90+	3OZ
ES-FS3528R-120H-24-Y	620-625 NM NM	— —	<9.6W	90+	3OZ
ES-FS3528Y-120H-24-Y	585-590 NM NM	— —	<9.6W	90+	3OZ
ES-FS3528G-120H-24-Y	517-522 NM NM	— —	<9.6W	90+	3OZ
ES-FS3528B-120H-24-Y	465-470 NM NM	— —	<9.6W	90+	3OZ

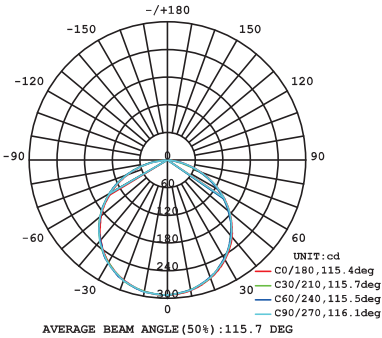

Strip length: CE:500CM UL:16.4FT

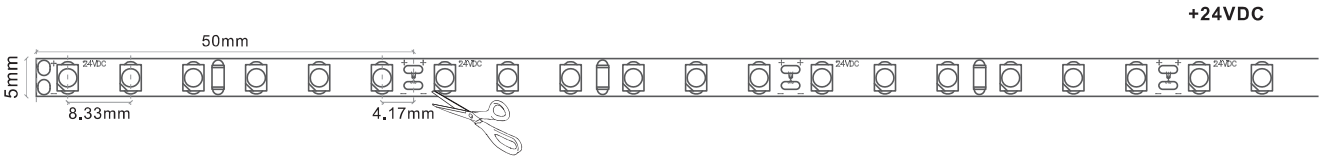

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated



AL. profiles (mm)

 ES-LL017009	 ES-LL024011	 ES-LL017015	 ES-LL013006
 ES-LL023009	 ES-LL030011	 ES-LL023015	 ES-LL013012
 ES-LL016016	 ES-LL020020-1	 ES-LL016015	 ES-LL025025
 ES-LL030030	 ES-LL010015	 ES-LL020020	
 ES-LL018018		 ES-LL010010	


AL. profiles (mm)

 ES-LL017009	 ES-LL024011	 ES-LL017015	 ES-LL013006
 ES-LL023009	 ES-LL030011	 ES-LL023015	 ES-LL013012
 ES-LL016016	 ES-LL020020-1	 ES-LL016015	 ES-LL025025
 ES-LL030030	 ES-LL010015	 ES-LL020020	
 ES-LL018018		 ES-LL010010	

Part Number:EST-FS3528C-60H-12-Y


Part Number:EST-FS3528C-60H-24-Y

Model	Color temp. Wave lengths	LM/M	Power/M	CRI (Ra)	FPC copper
ES-FS3528WW-60H-12-Y	2700K	360LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528WW-60H-12-Y	3000K	360LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528WW-60H-12-Y	3500K	360LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528NW-60H-12-Y	4000K	390LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528NW-60H-12-Y	5000K	390LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528PW-60H-12-Y	6500K	400LM	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528R-60H-12-Y	620-625 NM NM	— —	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528Y-60H-12-Y	585-590 NM NM	— —	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528G-60H-12-Y	517-522 NM NM	— —	<4.8W	90+	30Z(12V) 20Z(24V)
ES-FS3528B-60H-12-Y	465-470 NM NM	— —	<4.8W	90+	30Z(12V) 20Z(24V)

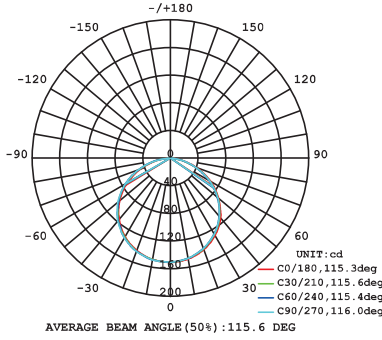



Strip length: CE:500CM UL:16.4FT(12V) | 16.4FT(24V)

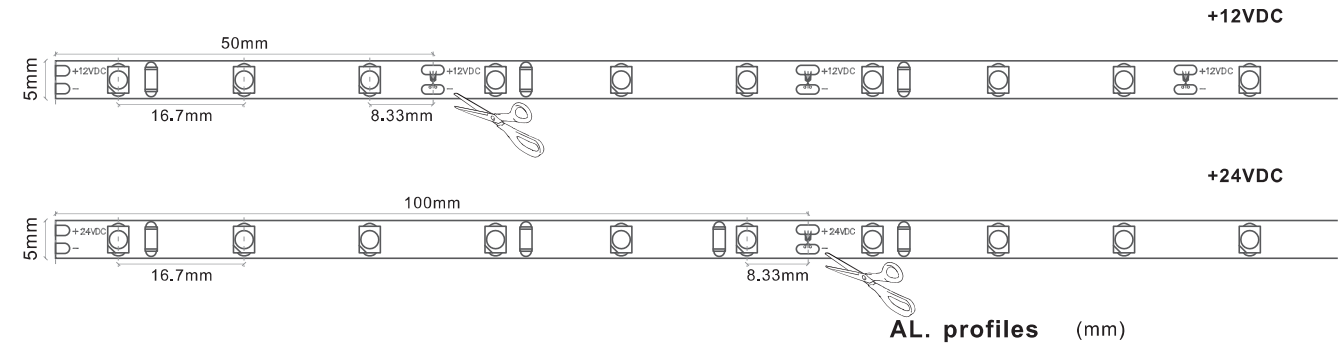

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated

