

Side View(Bendable)

LED Tape Light

Product Features

1. Flexible LED tape light with side light exit.
2. Use SMD3014 source which stronger than traditional SMD335 source.
3. Performance more stable and reliable than SMD335 side view LED strip.

EST-FS3014C-120-24-Y(Side View)

①

②

③

④

⑤

Color

3000 K	4000 K	5000 K	6500 K
RGB	RGB W		

Input DC Voltage

24VDC | 12VDC

LED Type

SMD3014

LED Qty.per meter

120


IP Index

IP20 | IP54 | IP67


Part Number:EST-FS3014C-120-24-Y(Side View)

Part Number:EST-FS3014C-120-12-Y(Side View)

Model	Color temp. Wave lengths	LM/M	Power/M	CRI (Ra)	FPC copper
ES-FS3014WW-120-24-Y	3000K	864LM	<9. 6W	80+	3OZ
ES-FS3014NW-120-24-Y	4000K	915LM	<9. 6W	80+	3OZ
ES-FS3014NW-120-24-Y	5000K	915LM	<9. 6W	80+	3OZ
ES-FS3014PW-120-24-Y	6500K	915LM	<9. 6W	80+	3OZ
ES-FS3014R-120-24-Y	620-625 NM NM	— —	<9. 6W	— —	3OZ
ES-FS3014Y-120-24-Y	585-590 NM NM	— —	<9. 6W	— —	3OZ
ES-FS3014G-120-24-Y	517-522 NM NM	— —	<9. 6W	— —	3OZ
ES-FS3014B-120-24-Y	465-470 NM NM	— —	<9. 6W	— —	3OZ

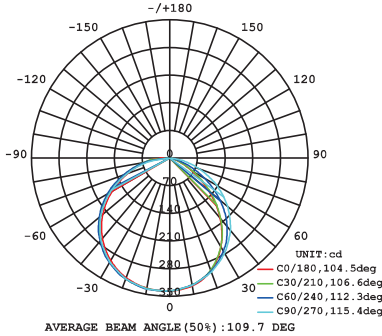

Strip length: CE: 500CM UL: 16.4FT

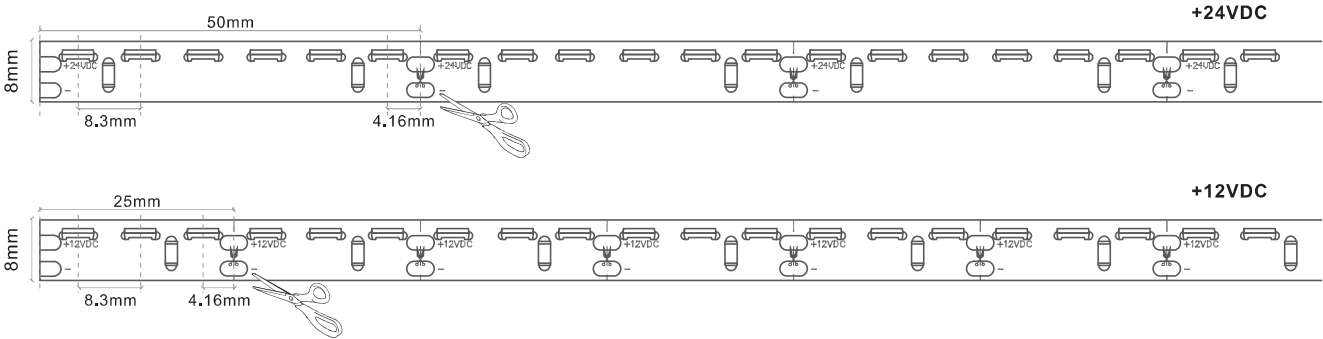

IP Rating:


- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated
- ☒ IP67---Silicon tube(transparent)



Side View


Part Number:EST-FS3014RGB-120-24-Y(Side View)

Model	Wave lengths	LM/M	Power/M	FPC copper
ES-FS3014RGB-120-24-Y	620-625 NM NM 517-522 NM NM 465-470 NM NM	720LM	<23W	3OZ

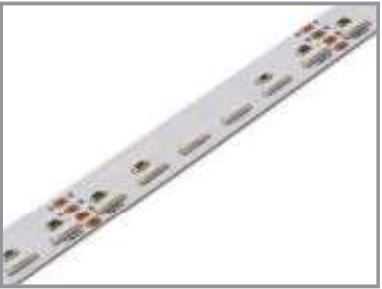


Controller

Product No.	Description
160102010110	12-24VDC 3A*3CH Max.9A 108W/216W(12V/24V)

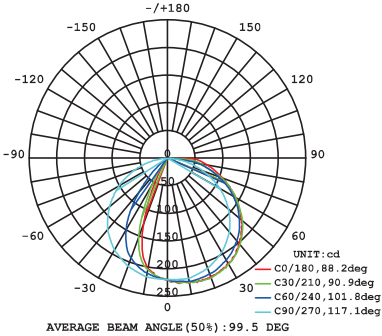

Strip length: CE: 500CM UL: 16.4FT

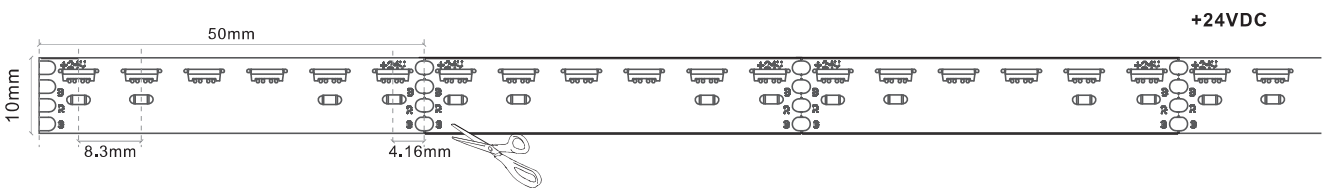

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated
- ☒ IP67---Silicon tube(transparent)




Part Number:EST-FS3014RGBW-120-24-Y(Side View)


Model	Wave lengths	LM/M	Power/M	FPC copper
ES-FS3014RGBW-120-24-Y	620-625 NM NM	565LM	<14.4W	3OZ
	517-522 NM NM			
	465-470 NM NM			
	2700-6500 K K			

Controller

Product No.	Description
160102010110	12-24VDC 3A*3CH Max.9A 108W/216W(12V/24V)

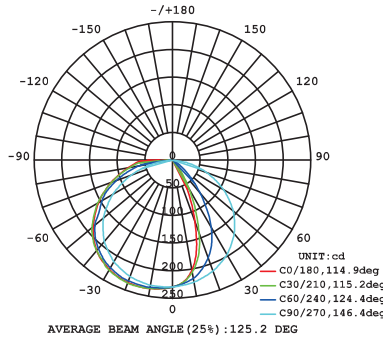

Strip length: CE: 500CM UL: 16.4FT

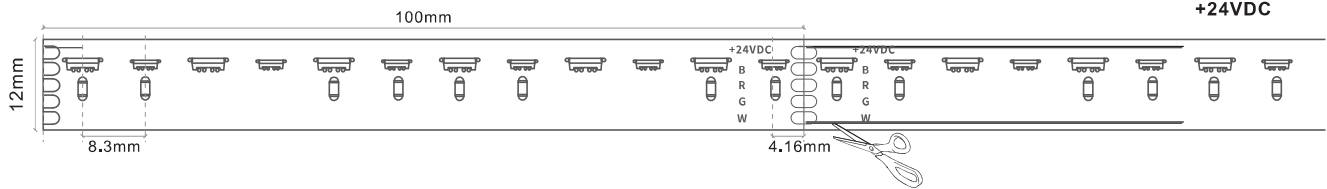

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated
- ☒ IP67---Silicon tube(transparent)

